



SONGZ product specification & drawings for LMD-VIT-ANDT

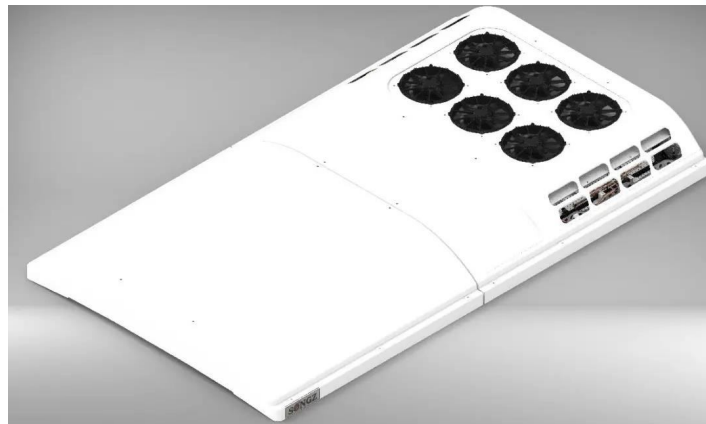


Cooling Capacity	*IMACA	25 kW
	*Standard	19 kW
Heat pump Heating Capacity		17 kW
Roof	Dimension	3250×1900×267 (mm)
	Weight	330 kg
	Air Flow Volume Condenser (Fan Quantity)	12000 m3/h (6)
	Air Flow Volume Evaporator (Blower Quantity)	6600 m3 /h (6)
	Shell material	High strength fiber glass
	Virus-killing Device (Air purifier)	Optional
Refrigerant	Type	R134a
Cooling Power Consumption		9.8 kw
Heating Power Consumption		8.7 kw
PTC Power Consumption		16 kw

Instructions:

1. Songz reserves the rights to update products without notice in advance;
2. Kindly contact SONGZ sales manager to obtain the latest specification, drawings to ensure the accuracy;
3. Different working conditions leads to different cooling capacity;
4. Many factors effecting the cooling effect, such as vehicle sealing, vehicle thermal insulation, etc.
5. *IMACA test conditions: evaporator side dry bulb temperature 32.3℃, wet bulb temperature 24℃;
*Standard test conditions: evaporator side dry bulb temperature 27℃, wet bulb temperature 19.5℃;

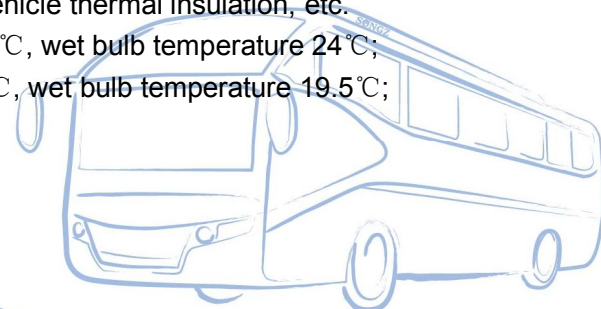

Roof unit:

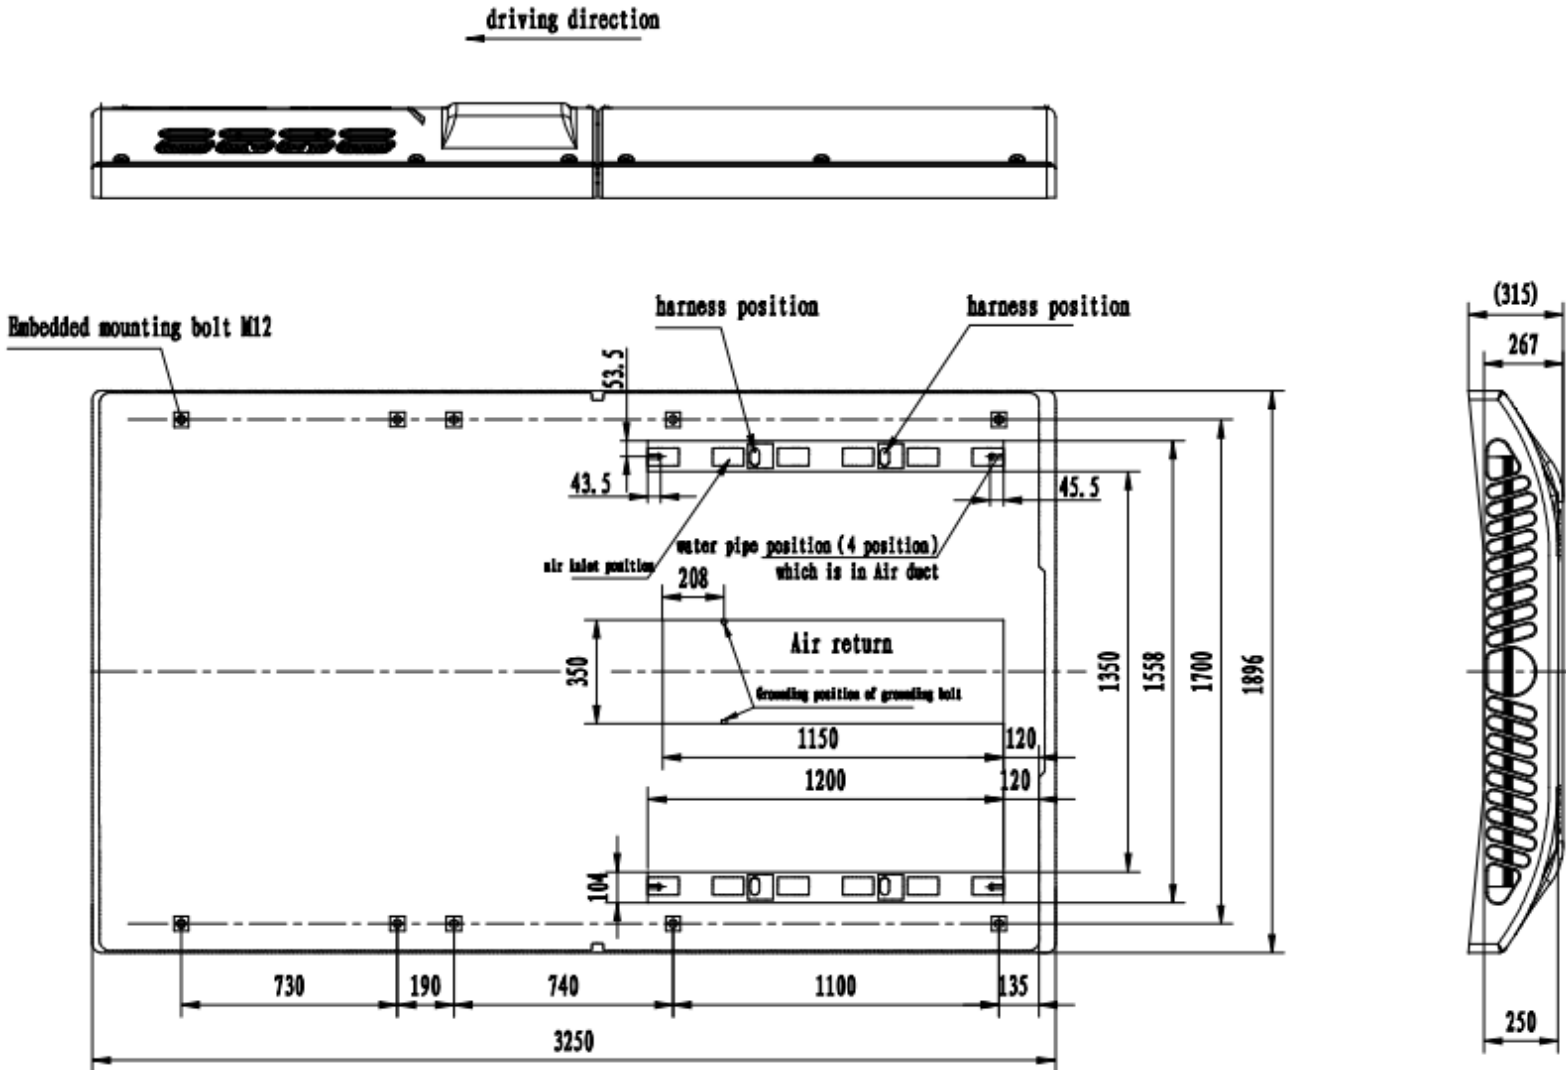

Control panel:

